


0300

使用说明书

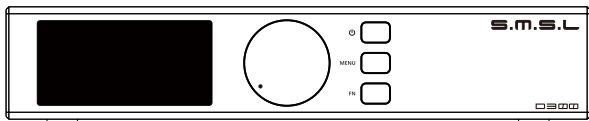

本说明书的内容可能会随版本更改, 如有变动, 恕不另行通知,
如需最新说明, 请到<https://smsl-audio.com/portal/product/support>
下载最新版本的说明书。

安全注意事项

- 请将本音响系统安装在通风良好、阴凉、干燥、干净的位置，远离直射阳光热源、振动、灰尘、潮湿或寒冷。
- 只能使用本机指定的电压。使用高于指定数值的电压很危险，而且可能导致火灾，损坏本机或造成人身伤害。对于使用高于指定电压造成的任何损害，我司将不负任何责任。
- 不要试图自行改造或修理本机。如果需要任何服务，请与销售或者我司客服人员联系。不管有任何理由，都没有打开机壳的必要。
- 如果打算长时间不使用本机（比如度假时），请从墙壁交流电源插座上断开电源线的连接。

重要提示：

本说明书所提到的产品规格和资讯仅供参考。如有内容更新，恕不另行通知。

保修条款

一、服务期限

佛山双木三林科技有限公司承诺产品的良好品质，产品自售出之后7天内正常使用情况下出现故障，客户可以选择退货或者保修（不影响二次销售才可退货）。正常使用一年内出现故障可以免费保修。

二、购买日期以销售商开出的购机发票或收据日期为准，网购可以交易截图为准。

三、有以下情况都不能享受“三包”服务

1. 一切人为因素损坏，包括非正常工作环境下使用或不按照说明书使用。
2. 用户私自拆机、改装、维修。
3. 使用非指定或许可的配件造成损坏的。
4. 机身的QC或保修贴损毁。
5. 不能出示有效购机凭证。
6. 不属于本公司产品。

四、保修方式为送修

此条款只适于中国大陆，其它地区请参考当地销售代理商的规定和国家法规。

特点

- 使用罗姆旗舰DAC芯片BD34301EKV, 并且全面优化使其性能, 使其THD+N低至-116dB;
- USB使用XMOS XU-208, 真正的32bit USB方案, PCM最高支持到768kHz, DSD支持到DSD512;
- 全新CK-03时钟处理电路, 以达到超低的时钟抖动使得光纤同轴的时钟抖动与USB一样优秀;
- 内置带屏蔽, 低噪声电源处理, 同时提高电源效率, 功耗更低;
- 特别设计的分立元件稳压电源和多个低噪声稳压电源, 为模拟电路提供低噪声电源;
- 高通最新蓝牙芯片支持SBC,AAC,aptX,aptX HD,LDAC;
- 高品质镀金输入输出连接端子;
- 全新设计的高品质旋钮;
- 高分辨彩色全贴合显示屏并具备熄屏功能;
- 使用钢化玻璃显示面板, 更高的透光率, 更长的使用寿命;
- 配备遥控器和全功能遥控;
- 日本音频协会(JAS)Hi-Res认证.

技术参数


输入方式	USB / 光纤 / 同轴 / 蓝牙		
输出方式	单端线路/平衡线路		
输出幅度	平衡线路	4.0Vrms	
	单端线路	2.0Vrms	
THD+N	0.00015% (-116dB)		
动态范围	平衡线路	127dB	
	单端线路	125dB	
信噪比	平衡线路	127dB	
	单端线路	124dB	
输出阻抗	平衡线路	200Ω	
	单端线路	100Ω	
USB传输方式	异步传输		
USB兼容性	Windows 7 / 8 / 8.1 / 10 / 11, Mac OSX, Linux		
位深	USB	1bit, 16~32bit	
	光纤 / 同轴	1bit, 16~24bit	
采样率	USB / I ² S	PCM	44.1~768kHz
		DSD	2.8224~22.5792MHz
	光纤 / 同轴	PCM	44.1~192kHz
蓝牙规格	5.0(支持SBC,AAC,aptX,aptX HD,LDAC)		
消耗功率5W		
待机功耗	<.5W		
体积	208x185x41mm(WxHxD)		
重量	1.05kg / 2.31 lbs		

SMSL保留在不另行通知的情况下进行可能导致规格或特性更改的改进的权利。

关于遥控器

- 如果遥控器距离本机很近时操作仍无效，请用新电池更换。
- 如果要长时间不使用遥控器，请取出遥控器的电池。
- 按照电池处置的地方性法规处置废旧电池。


遥控器的使用

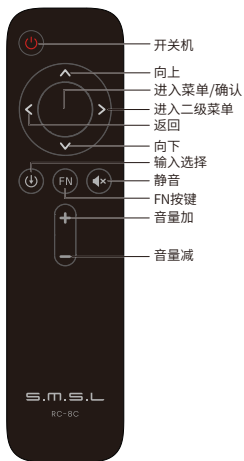

注意

遥控器请使用2节7号(AAA)电池

部件介绍

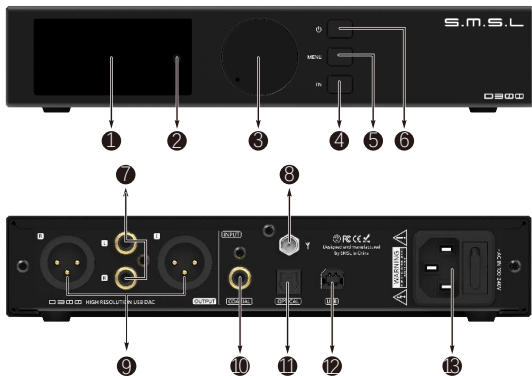


- | | | |
|----------|---------|-----------|
| 1 显示屏 | 2 红外接收窗 | 3 旋钮 |
| 4 FN按钮* | 5 菜单按钮 | 6 开关机按钮** |
| 7 单端线路输出 | 8 蓝牙天线 | 9 平衡线路输出 |
| 10 同轴输入 | 11 光纤输入 | 12 USB输入 |
| 13 电源输入 | | |

* FN按钮: 此按键可以在菜单"FN KEY FOR"中定义其功能!

**开关机按钮:短按切换输入源, 长按开关机

操作说明

1. 主界面

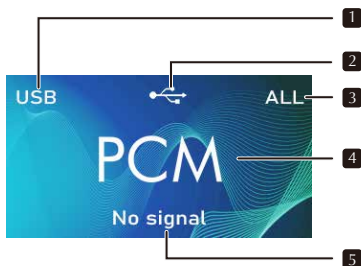

1、输入方式

2、输入方式显示

3、输出显示

4、音频格式

5、采样率,蓝牙输入时,显示解码格式(SBC, AAC, APTX, APTX HD, LDAC)

功能介绍

■ INPUTS (输入方式)

- USB AUDIO (USB输入)
- OPTICAL (光纤输入)
- COAXIAL (同轴输入)
- BLUETOOTH(蓝牙输入)

■ OUTPUTS (输出方式)

- ALL (全部输出)
- XLR (平衡输出)
- RCA (单端输出)

■ PHASE MODE (相位模式)

- NORMAL(2+/3-)(正常模式)
- XLR Inverted (XLR反向模式)
- ALL Inverted (RCA反向模式)

■ PCM FILTER (PCM滤波器)

- Slow Roll-Off (缓慢滚降)
- Sharp Roll-Off (快速滚降)

■ DSD FILTER (DSD滤波器)

- 13k Cutoff (13KHZ频率截止)
- 26k Cutoff (26KHZ频率截止)
- 52k Cutoff (52KHZ频率截止)

■ HPC MODE (HPC模式)

- Disable (关闭高精度运算模式)
- Enable (启动高精度运算模式)

推荐使能, 这个设置会改变声音表现。

禁用HPC模式时会提升中低频性能, 但会降低高频信噪比。



■ PRE MODE (前级模式)

- Vol Fixed:输出接口音量是固定的
- Vol Variable:输出接口音量是受控的
(只在播放PCM时起作用,在此模式下播放DSD无输出,因为DAC芯片不支持DSD音量调节)

■ FN KEY FOR (FN按钮)

- Bluetooth (蓝牙输入)
- Outputs (输出选择)
- Phase (相位模式)

■ DIMMER (自动熄屏)

- 5秒~60秒

范围5秒 - 60秒, 设置后, 屏会在这个时间内自动熄灭, 遥控或者旋钮任意操作屏幕会重新点亮。这样可以很大程度减少光污染, 提升听音环境的舒适性!

■ BRIGHTNESS (显示屏亮度设置)


- LEVEL 1 ~ LEVEL 6

■ RESET (系统复位)

- 在蓝牙输入时, 长按菜单按钮, 系统只会重置蓝牙配对状态;
- 在其它输入时, 长按菜单按钮, 系统清除所有设定, 包括蓝牙。

0300

USER MANUAL

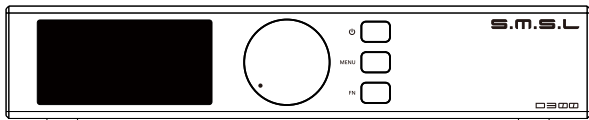

The contents of this manual may change with the version,
if there is any change without notice,
please go to <https://www.smsl-audio.com/portal/product/support>
Download the latest version of the manual.

Safety Notes

- Install this unit in a well ventilated, cool, dry, clean place-away from direct sunlight, heat sources, vibration, dust, moisture, or cold..
- Use the voltage specified on this unit Only. Using this unit with a higher voltage than specified is dangerous and may cause fire , damage to this unit, or personal injury. Our company will not be held responsible for any damage resulting from the use of this unit with a voltage other than that specified.
- Do not attempt to modify or fix this unit by yourself. Contact a person or customer service when any service is needed. The cabinet should never be opened for any reason.
- When not planning to use this unit for long periods of time (i.e. when going on vacation), disconnect the power cable from the AC wall outlet.

Important note:

The product specifications and information mentioned in this manual are for reference only. The content of this manual is subject to change without notice.

Warranty Terms

1.The Term of Service

Foshan Shuangmusanlin Technology Co., Ltd promises to offer good-quality products. If the product is broken in 7 days after purchasing when you use it normally, you can choose to send it back for return, replacement or repairing (only the product does not affect the second sales can be returned). Repairing for free in one year if you use it normally.

2.Date of purchase is in accordance with the date on invoice or receipt used by seller, and if you buy it on line, you can show the screenshot of trade.

3.If an inappropriate usage causes the unit damaged, the warranty will be void. As below.

- All damages by inappropriate use, including using it under non-normal working environment or without following the instructions.
- Dismantling, refitting, repairing by user in private.
- Causing damage by using some fittings instead of the designative or accredited ones.
- Cannot provide credible proof of purchase.

4.Sending it back to our company for repairing.

5.Contact your S.M.S.L Audio reseller for a return or replacement.

Features

- Use Rohm's flagship DAC chip BD34301EKV, and fully optimize its performance to make its THD+N as low as -116dB;
- USB uses XMOS XU-208, a real 32bit USB solution, PCM supports up to 768kHz, and DSD supports up to DSD512;
- The new CK-03 clock processing circuit, in order to achieve ultra-low clock jitter, makes the clock jitter of fiber coaxial as excellent as USB;
- Built-in shielding, low-noise power supply processing, while improving power efficiency and lower power consumption;
- The specially designed discrete component stabilized power supply and multiple low-noise stabilized power supplies provide low-noise power supply for analog circuits;
- Qualcomm's latest Bluetooth chip supports SBC, AAC, aptX, aptX HD, LDAC;
- High-quality gold-plated input and output connection terminals;
- Newly designed high-quality knobs;
- High-resolution color fully-fitted display screen and screen-off function;
- Use tempered glass display panel, higher light transmittance, longer service life;
- Equipped with remote control and full-function remote control;
- Japan Audio Association (JAS) Hi-Res certification.

Specifications


Input	USB / Optical / Coaxial / Bluetooth	
Output	RCA /XLR	
Output Level	XLR	4.0Vrms
	RCA	2.0Vrms
THD+N	0.00015%(-116dB)	
Dynamic range	XLR	127dB
	RCA	125dB
SNR	XLR	127dB
	RCA	124dB
Output impedance	XLR	200Ω
	RCA	100Ω
USB transmission	Asynchronization	
USB compatibility	Windows 7 / 8 / 8.1 / 10 / 11, Mac OSX、Linux	
Bit depth	USB	1bit, 16 ~ 32bit
	Optical / Coaxial	1bit, 16 ~ 24bit
Sampling rate	USB / PS	PCM 44.1 ~ 768kHz
		DSD 2.8224 ~ 22.5792MHz
	Optical / Coaxial	PCM 44.1 ~ 192kHz
		DSD DSD64(DoP)
Bluetooth specification.....	BT 5.0(support SBC,AAC,aptX,aptX HD,LDAC)	
Power Consumption	5W	
Standby power	<0.5W	
Size	208x185x41mm (WxHxD)	
Weight	1.05kg / 2.31lbs	

SMSL reserves the right to make improvements which may result in specification or feature changes without notice.

Remote control

- Install 2 x AAA batteries as instructions.
- When using the remote control, point it toward the remote control signal receiver on the main unit from a distance of 5 m (16 ft) or less. Do not place obstructions between the main unit and the remote control.
- The remote control might not work if the remote control signal receiver on the unit is exposed to direct sunlight or bright light. If this occurs, try moving the unit. Beware that use of this remote control could cause the unintentional operation of other devices that can be controlled by infra.


Operating the remote control

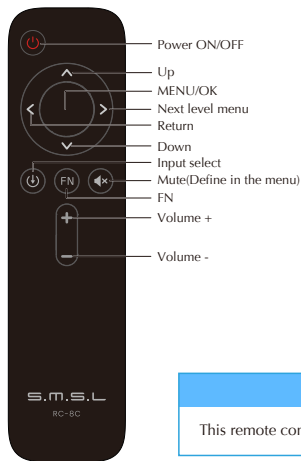

Note

This remote controller use 2 x R03/AAA batteries.

Display Interface and Instructions

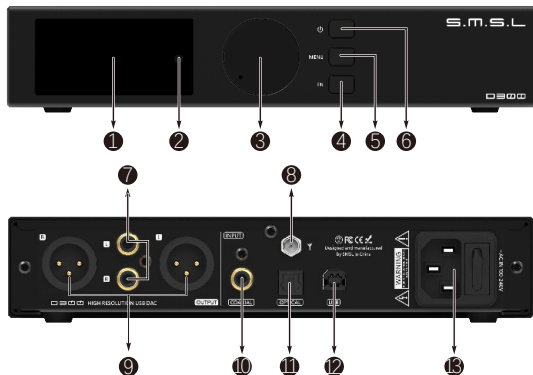


- | | | |
|-----------------------------|----------------------------|---------------------------------|
| 1 Display | 2 Remote window | 3 Knob |
| 4 FN button* | 5 Menu button | 6 Turn on / off button** |
| 7 RCA output | 8 Bluetooth antenna | 9 Balanced output |
| 10 Coaxial input | 11 Optical input | 12 USB input |
| 13 AC IN(100-240VAC) | | |

* FN button: This button can define its function in the menu "FN KEY FOR"

**Turn on / off button: PRESS to switch the INPUT, HOLD for POWER ON/OFF

User interface

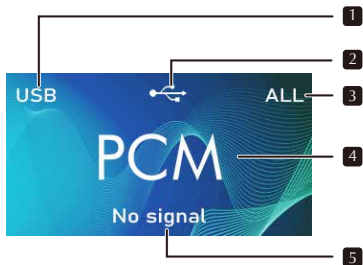

- 1、 Input source name
- 2、 Input source icon
- 3、 Output interface
- 4、 Audio format
- 5、 Sampling rate,When Bluetooth input, display the decoding format (SBC, AAC, APTX, APTX HD, LDAC)

Instructions

■ INPUTS

- USB AUDIO
- OPTICAL
- COAXIAL
- BLUETOOTH

■ OUTPUTS

- ALL
- XLR
- RCA

■ PHASE MODE

- NORMAL(2+/3-)
- XLR Inverted
- ALL Inverted

■ PCM FILTER

- Slow Roll-Off
- Sharp Roll-Off

■ DSD FILTER

- 13K Cutoff
- 26k Cutoff
- 52k Cutoff

■ HPC MODE

- Disable
- Enable

It is recommended to enable, this setting will change the sound performance. Disabling HPC mode will improve mid- and low-frequency performance, but will reduce the high-frequency signal-to-noise ratio.



■ PRE MODE

- Vol Fixed : In this mode, volume is fixed on max output level, and the D300 will ignore the volume operations.
- Vol Variable: In this mode, volume can be adjust(only works for PCM,no output when play DSD in this mode, because this DAC chip does not support DSD volume adjustment).

■ FN KEY FOR

- Bluetooth
- Outputs
- Phase

■ DIMMER

- 5 Second ~ 60 Second

The range is 5 seconds - 60 seconds. After setting, the screen will automatically go off within this time, and the screen will re-light up if you operate the remote control or the knob at any time.

■ BRIGHTNESS

- LEVEL 1~ LEVEL 6

■ RESET

- During Bluetooth input, long press the middle button of the knob, the system will only reset the Bluetooth pairing status;
- During other input, long press the middle button of the knob, the system will clear all settings, including Bluetooth.