

PARAMETERS

| | |
|-----------------------------|----------|
| Impedance | 4 ohms |
| Re | 3.6 ohms |
| Le | 0.013 mH |
| Fs | 1,200 Hz |
| Qms | N/A |
| Qes | N/A |
| Qts | N/A |
| Mms | N/A |
| Cms | N/A |
| Sd | N/A |
| Vd | N/A |
| BL | N/A |
| Vas | N/A |
| Xmax | N/A |
| VC Diameter | 9 mm |
| SPL | N/A |
| RMS Power Handling | 1 watts |
| Usable Frequency Range (Hz) | N/A |

FEATURES

- Extremely small design can fit almost anywhere
- Unique suspension allows high excursion for surprisingly powerful response
- Pre-applied 3M™ VHB™ adhesive for quick, durable installation
- Rare-earth neodymium motor and a proprietary 9 mm voice coil
- 4 ohms impedance for use with small, Class D amplifiers

APPLICATIONS


- Invisible home theater and multi-room audio
- Electronic gaming machines
- Advertising signage
- Point-of-purchase displays
- Multimedia exhibits
- Commercial distributed audio
- Kiosks
- Automotive audio
- Bathroom tubs and showers

IMPEDANCE/PHASE



Measurement taken with transducer uncoupled facing upward.

FREQUENCY RESPONSE

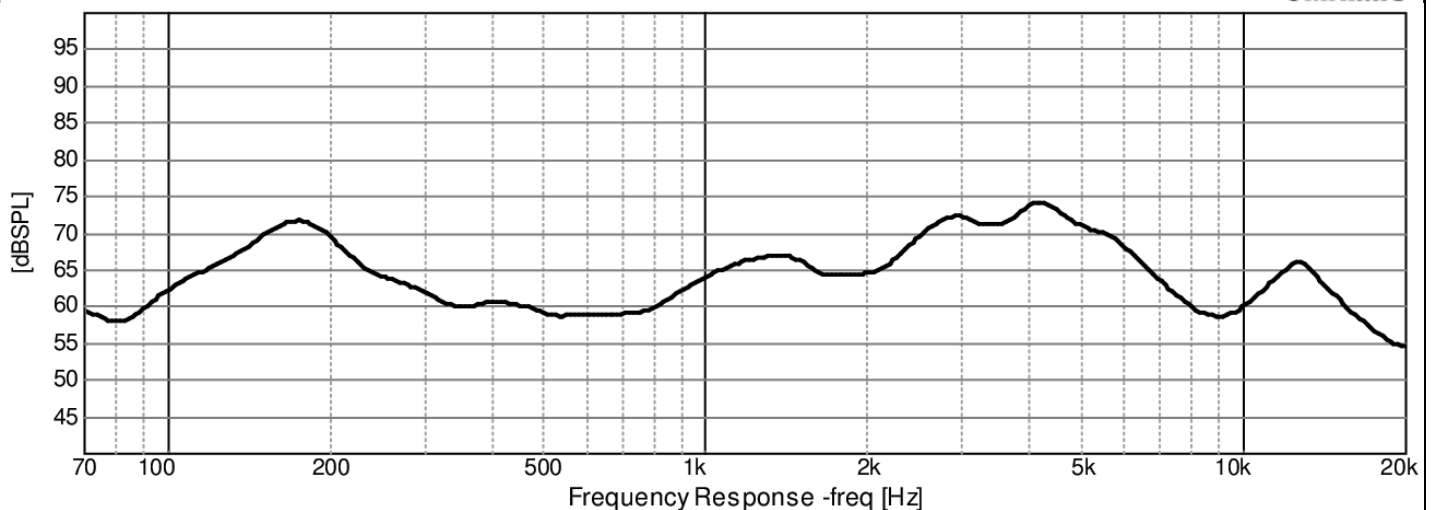

OmniMic

1/3rd octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.