




DAEX32EP-4 Thruster 32mm Exciter 40W 4 Ohm

DAEX32EP-4

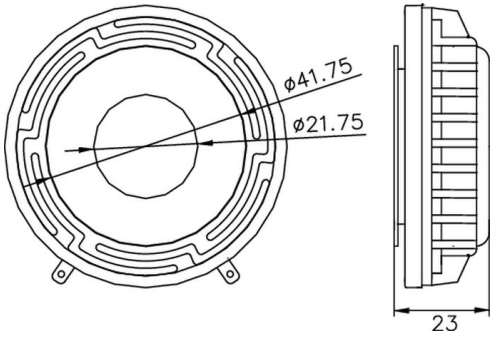

PARAMETERS

| | |
|-----------------------------|-----------------|
| Impedance | 4 ohms |
| Re | 3.3 ohms |
| Le | 0.21 mH @ 1 kHz |
| Fs | 395 Hz |
| Qms | N/A |
| Qes | N/A |
| Qts | 1.38 |
| Mms | 5.4 g |
| Cms | 0.08 mm/N |
| Sd | N/A |
| Vd | N/A |
| BL | 4.2 Tm |
| Vas | N/A |
| Xmax | N/A |
| VC Diameter | 32 mm |
| SPL | N/A |
| RMS Power Handling | 40 watts |
| Usable Frequency Range (Hz) | N/A |


FEATURES

- Robust, heavy-duty design with a 32 mm voice coil attached to a steel spider
- Pre-applied 3M™ VHB™ adhesive for quick, secure installation
- Rare-earth neodymium motor and a proprietary two-layer voice coil
- 4 ohms impedance for use with small, Class D amplifiers
- 40 watt RMS power handling for high output


APPLICATIONS

- Invisible home theater and multi-room audio
- Electronic gaming machines
- Advertising signage
- Point-of-purchase displays
- Multimedia exhibits
- Commercial distributed audio
- Kiosks
- Automotive audio
- Bathroom tubs and showers

IMPEDANCE/PHASE

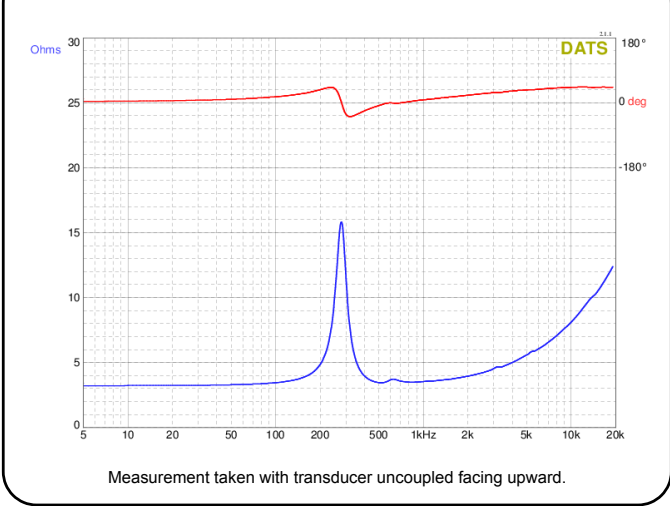

FREQUENCY RESPONSE

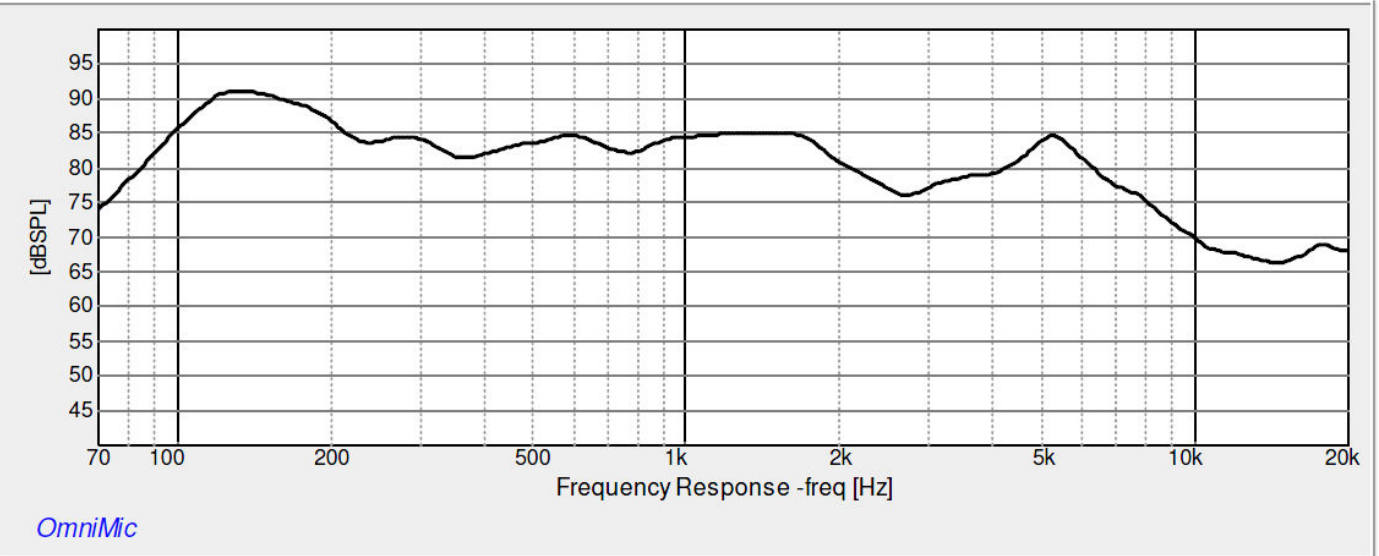

1/3rd octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.