


Parameters

| | |
|-----------------------------|-----------|
| Impedance (Ω) | 16 |
| Re (Ω) | 14.4 |
| Le (mH) @ 1 kHz | 1.35 |
| Fs (Hz) | 831 |
| Qms | 2.42 |
| Qes | 8.71 |
| Qts | 1.89 |
| Mms (g) | 0.05 |
| Cms (mm/N) | 0.70 |
| Sd (cm ²) | 4.52 |
| Vd (cm ³) | 0.04 |
| BL (Tm) | 0.68 |
| VAs (liters) | 0.02 |
| XMAX (mm) | 0.1 |
| VC Diameter (mm) | 12.5 |
| SPL (dB 1W/1m) | 77.1 |
| RMS Power Handling (w) | 0.5 |
| Usable Frequency Range (Hz) | 830-5,000 |

Features

- Lightweight Mylar diaphragm
- High-efficiency “buzzer” style design
- Neodymium magnet structure
- Rugged steel frame and front gasket
- Suitable for low power applications
- 16 Ohm Impedance

Frequency Response

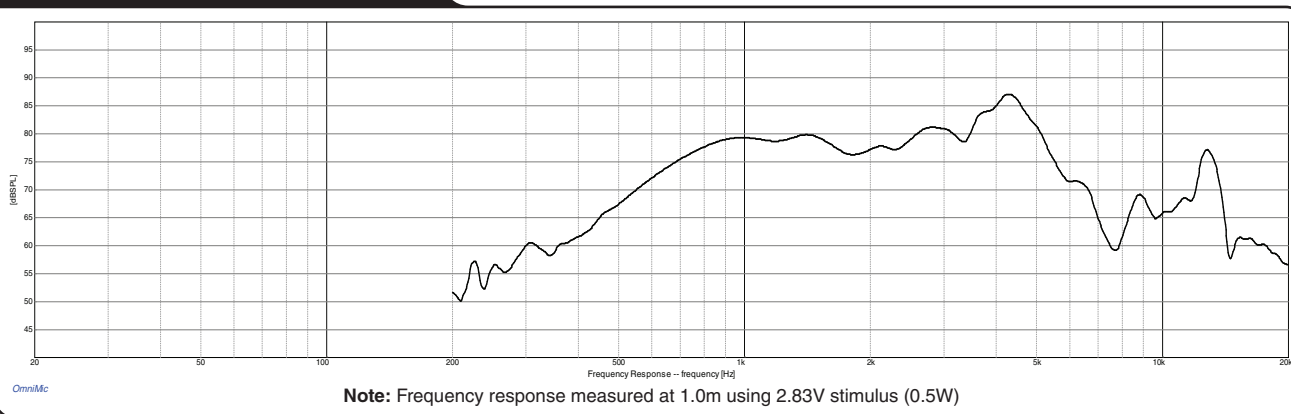

Note: Frequency response measured at 1.0m using 2.83V stimulus (0.5W)

Note: All dimensions in mm.

Impedance/Phase

