




# PT5010-8 10" PLANAR MID/ TWEETER 8 OHM


## MECHANICAL DRAWING

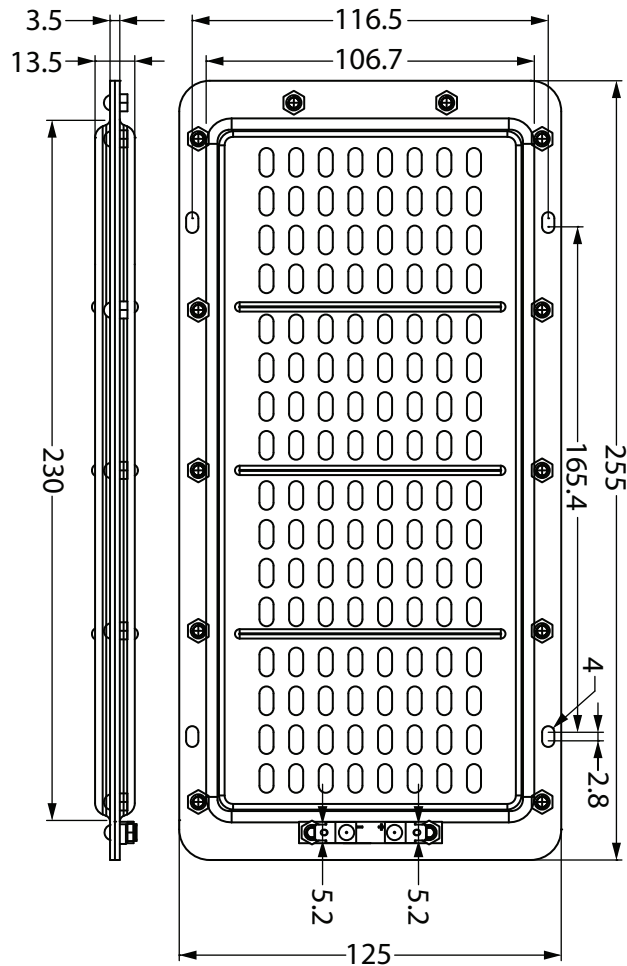

## FEATURES

- Extremely low mass diaphragm provides excellent transient response and accuracy
- Large diaphragm produces high efficiency with incredible dynamics
- Remarkably wide bandwidth for predictable transition to woofer and tweeter drivers
- Open back delivers true dipole radiation for use in open baffle designs
- Linear impedance simplifies crossover design
- Shallow mounting depth for use in low profile designs


## IMPEDANCE/PHASE

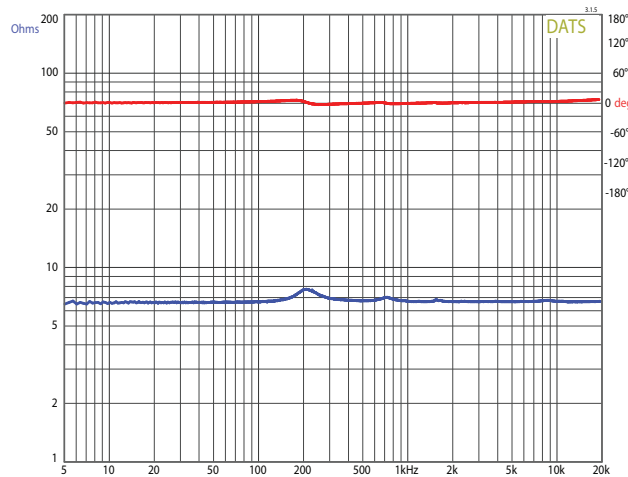

## PARAMETERS

Impedance	8 ohms
Re	6.8 ohms
Le	0.01 mH @ 10 kHz
Fs	N/A
Qms	2.14
Qes	N/A
Qts	1.96
Mms	N/A
Cms	N/A
Sd	148.2 cm <sup>2</sup>
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	N/A
SPL	94 dB @ 2.83V/1m
RMS Power Handling (EIA RS-426B)	70 watts
Usable Frequency Range (Hz)	200 - 8,000 Hz

## FREQUENCY RESPONSE

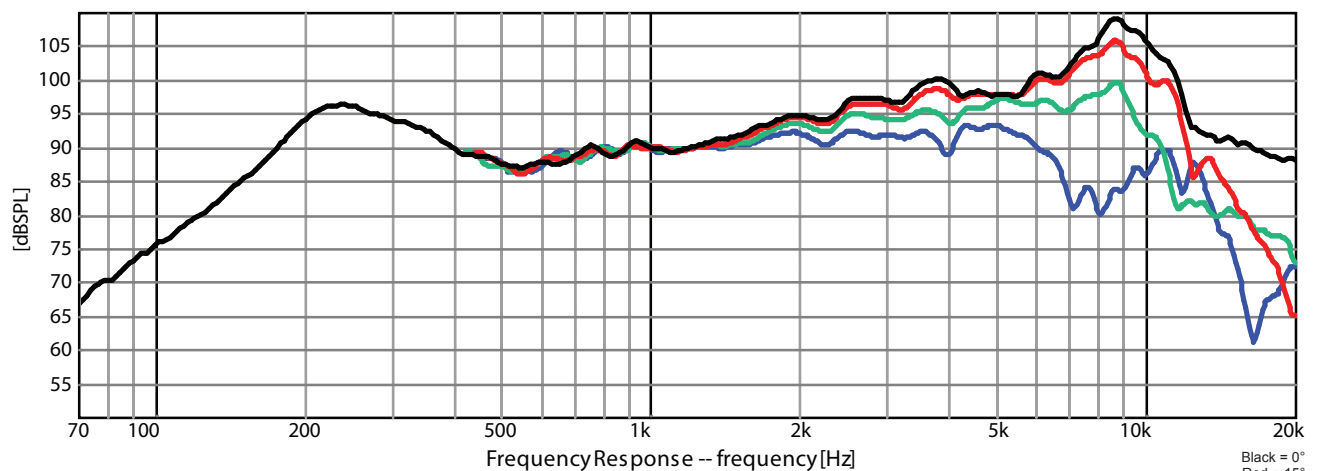

OmniMic

Black = 0°  
Red = 15°  
Green = 30°  
Blue = 45°