



EW 428

Elite Woofer,

Ø 4", Ø 2.1" voicecoil, 8Ω



SPECIFICATIONS

General Data		
Overall Dimensions	DxH	118.5mm(4.66")x56mm(2.20")
Nominal Power Handling (DIN)	P	150W
Transient Power 10ms		800W
Sensitivity 2.83V/1M		87dB SPL
Frequency Response		See graph
Cone Material		Damped Polymer Composite
Net Weight	Kg	0.518

Electrical Data		
Nominal Impedance	Z	8Ω
DC Resistance	Re	6.3Ω
Voice Coil Inductance @ 1KHz	LBM	0.44mH


Voice Coil and Magnet Parameters		
Voice Coil Diameter	DIA	54mm
Voice Coil Height		14mm
HE Magnetic Gap Height	HE	5mm
Max. Linear Excursion	X	± 4.5mm
Voice Coil Former		Aluminum
Voice Coil Wire		Hexatech™ Aluminum
Number Of Layers		2
Magnet System Type		Neodymium vented
B Flux Density	B	0.94 T
BL Product	BXL	6.1 N.A

T-S Parameters		Small Signal	1 V
Suspension Compliance	Cms	1.046 mm/N	
Mechanical Q Factor	Qms	2.36	
Electrical Q Factor	Qes	0.41	
Total Q Factor	Qts	0.35	
Mechanical Resistance	Rms	1.02 Kg/s	
Moving Mass	Mms	6.16 g	
Eq. Cas Air Load (liters)	VAS	4.7 Lt	
Resonant Frequency	Fs	62 Hz	
Effective Piston Area	SD	57 cm ²	



FEATURES

- * Uniflow™ steel chassis
- * Neodymium magnet system
- * 2.1" Large Hexatech™ Aluminum voice coil
- * High power handling
- * Shallow profile D.P.C cone
- * High linear excursion

Unit Dimensions

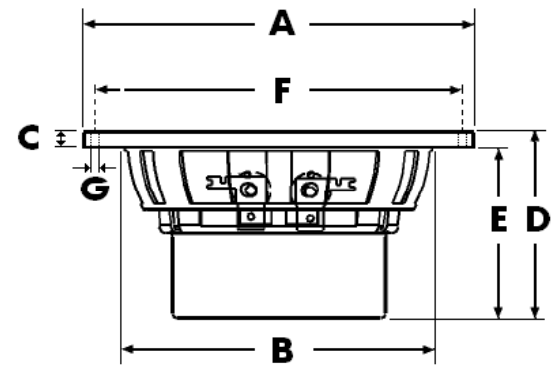

A - Overall diameter	118.5mm
B - Cut out diameter	94mm
C - Flange thickness	5mm
D - Overall height	56mm
E - Basket + magnet depth	51mm
F - Mounting holes location diameter	110mm
G - 4 Mounting holes, at 90° interval, inner hole diameter	Ø 3mm

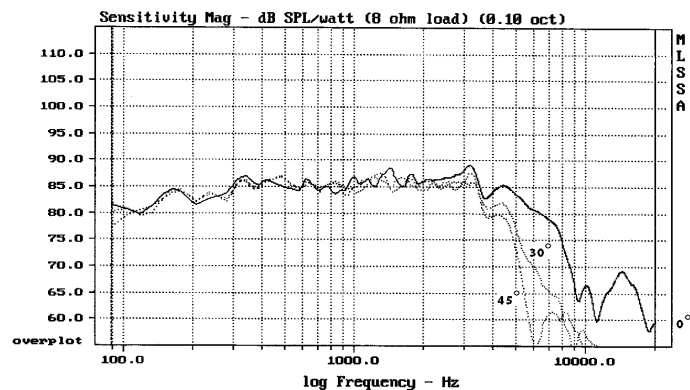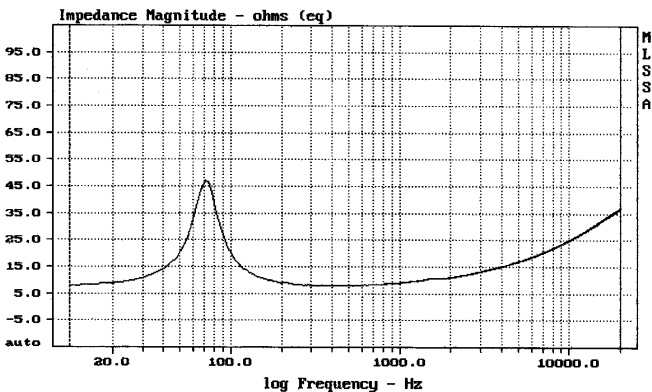

Measured on IEC baffle using Bruel & Kjaer 3144 model microphone.

Morel operate policy of continuous product design improvement, consequently specifications are subject to alteration without prior notice.