



F SERIES


W1-2361S

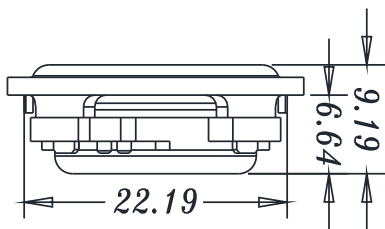

black and red wire : 100±5mm

- EXTREMELY SLIM 1" FULL RANGE DRIVER, BUILT WITH MOST INNOVATIVE AND HIGHEST PERFORMANCE DESIGN
- 25mm OUTSIDE DIAMETER, $F_0:220\text{Hz}$
- ALUMINUM DIAPHRAGM, TPV SURROUND AND NEODYMIUM MAGNET SYSTEM
- BEST FOR LIMITED SPACE AND NEED GOOD SOUND APPLICATION

1" ALUM, FULL RANGE

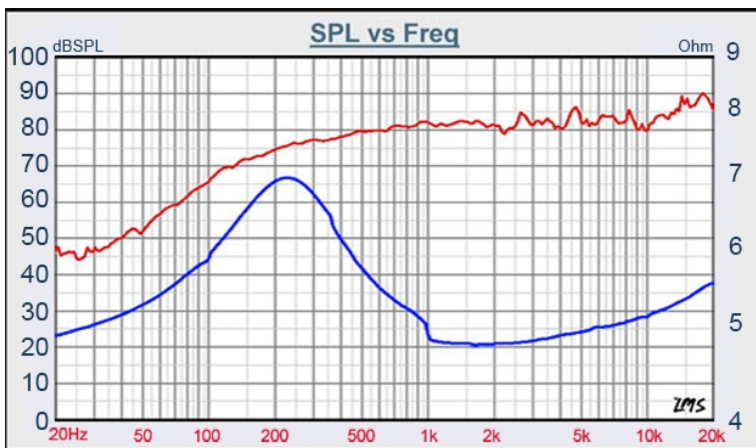

DIAPHRAGM MTL	Aluminium
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.6 Ω
SENSITIVITY 1W/1m	81 dB
FREQUENCY RESPONSE	220 -20K Hz
FREE AIR RESONANCE	220 Hz
VOICE COIL DIAMETER	13.28 mm
AIR GAP HEIGHT	1.5 mm
RATED POWER INPUT	1 W
MAXIMUM POWER INPUT	2 W
FORCE FACTOR, BL	1.33 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	0.13 g
FERROFLUID ENHANCED	NO
SUSPENSION COMPLIANCE	3751 μMN^{-1}
EFFECTIVE PISTON AREA	0.00025 M^2
Levc	0.0036 mH
Zo	7 Ω
X-max	0.25 mm
Vas	0.33 Litr
Qts	0.18
Qms	0.35
Qes	0.38



VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com