




AMTPRO-4 Air Motion Transformer Tweeter 4 Ohm

AMTPRO-4

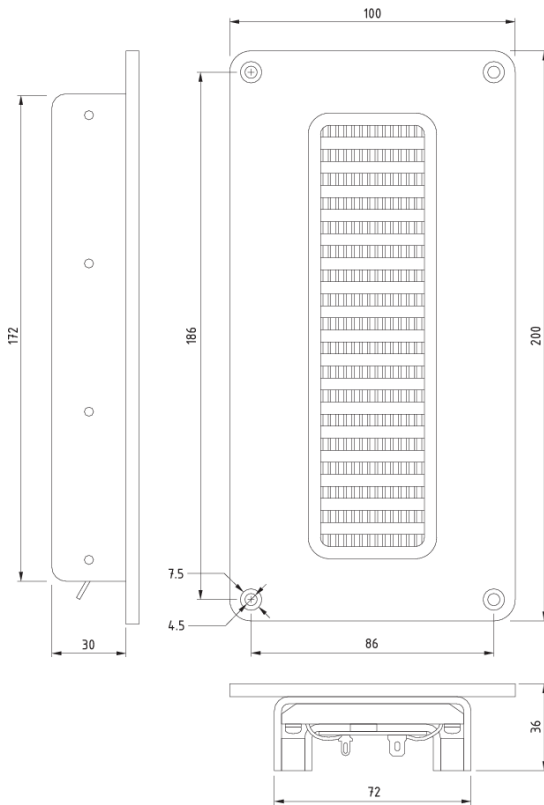

PARAMETERS

| | |
|-----------------------------|-----------------------|
| Impedance | 4 ohms |
| Re | 3.96 ohms |
| Le | 0.06 mH @ 10k Hz |
| Fs | N/A |
| Qms | N/A |
| Qes | N/A |
| Qts | 4.12 |
| Mms | N/A |
| Cms | N/A |
| Sd | 54.72 cm ² |
| Vd | N/A |
| BL | N/A |
| Vas | N/A |
| Xmax | N/A |
| VC Diameter | N/A |
| SPL | 94 dB 1W/1m |
| RMS Power Handling | 50 watts |
| Usable Frequency Range (Hz) | 800 - 18,000 Hz |


FEATURES

- Advanced Air Motion Transformer design "squeezes" air molecules instead of shoving or crushing them
- Folded Kapton ribbon diaphragm delivers clean, detailed, and highly dynamic output
- Robust metal faceplate provides secure, stable mounting
- Powerful, lightweight neodymium magnet structure for low distortion and high efficiency
- Open back design permits dipole or chamber loading

IMPEDANCE/PHASE



FREQUENCY RESPONSE

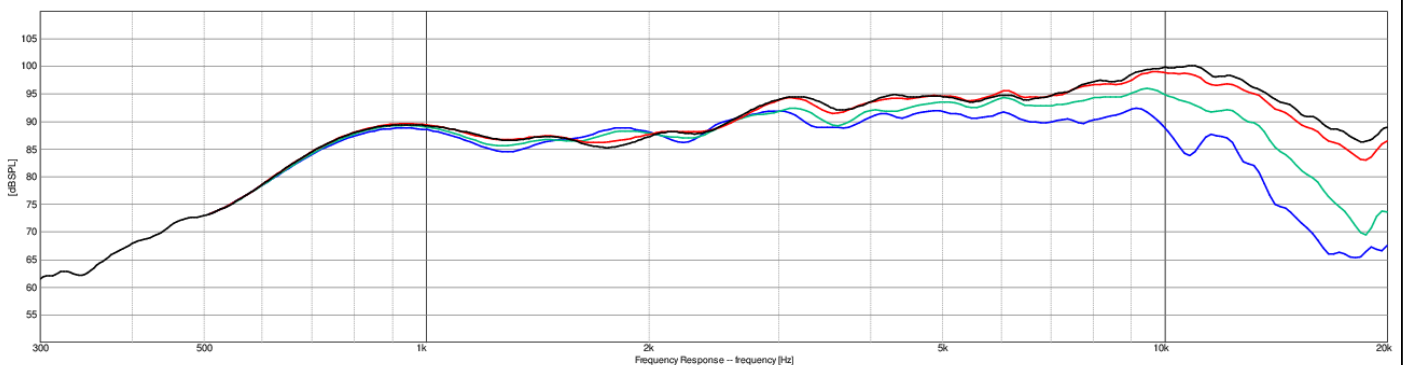

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°