


PARAMETERS

Impedance	8 ohms
Re	7.2 ohms
Le	0.17 mH @ 1kHz
Fs	203 Hz
Qms	8.13
Qes	1.72
Qts	1.42
Mms	1.6 g
Cms	0.38 mm/N
Sd	26.3 cm ²
Vd	5.79 cm ³
BL	2.94 Tm
Vas	0.37 liters
Xmax	2.2 mm
VC Diameter	16 mm
SPL	85 dB @ 2.83V/1m
RMS Power Handling (AES 426B)	15 watts
Usable Frequency Range (Hz)	150 - 17,000 Hz


IMPEDANCE/PHASE

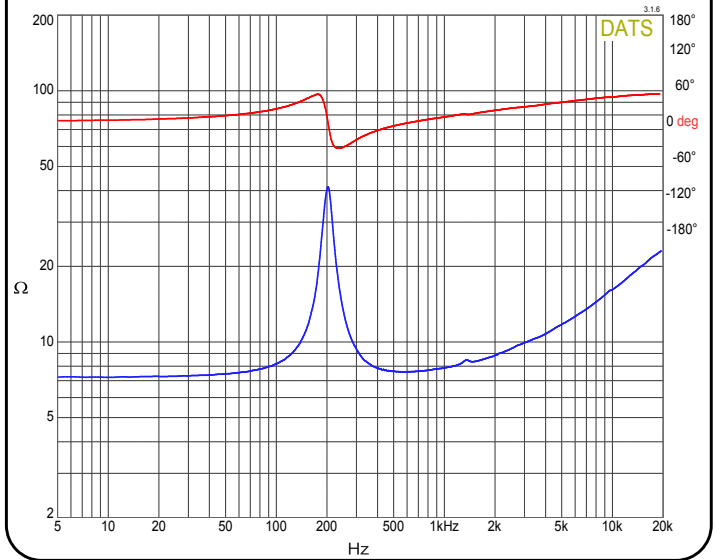

FEATURES

- High economic value
- Delivers crisp, clear audio, ensuring an immersive listening experience
- High-quality audio solutions without breaking the bank, ideal for budget-conscious projects
- Suitable for commercial installations, DIY projects, art exhibits, and more

FREQUENCY RESPONSE

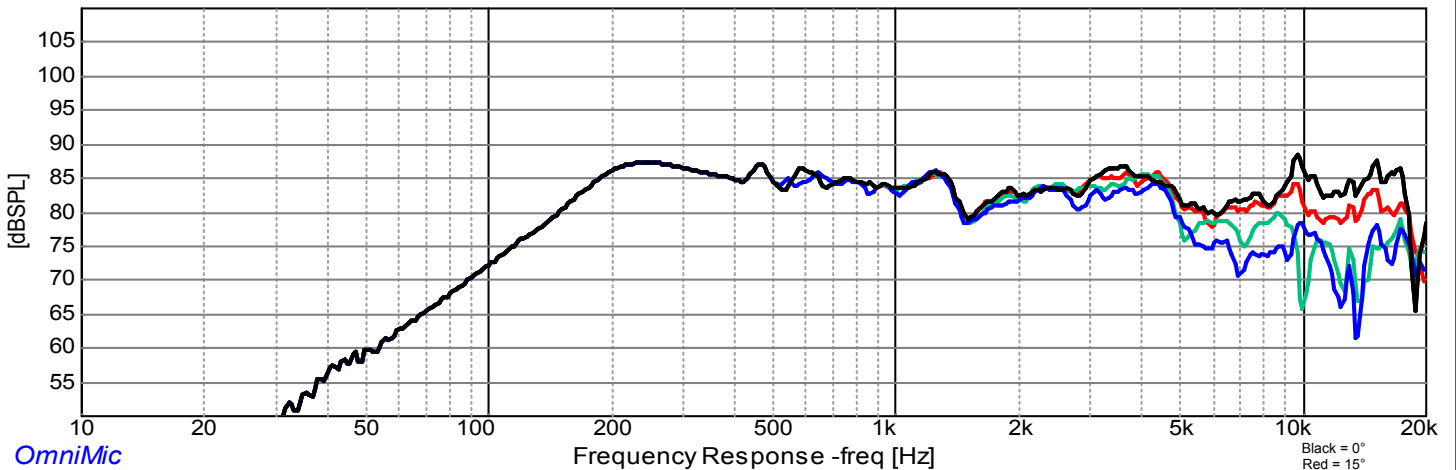

Note: 1/24th octave smoothing - near field response included in graph below 450 Hz.