


PARAMETERS

Impedance	4 ohms
Re	3.3 ohms
Le	0.13 mH @ 10kHz
Fs	184 Hz
Qms	6.67
Qes	0.53
Qts	0.49
Mms	1.2 g
Cms	0.63 mm/N
Sd	6.6 cm ²
Vd	1.06 cm ³
BL	2.94 Tm
Vas	0.039 liters
Xmax	1.6 mm
VC Diameter	16 mm
SPL	82 dB @ 2.83V/1m
RMS Power Handling (AES 426B)	5 watts
Usable Frequency Range (Hz)	200 - 20,000 Hz


IMPEDANCE/PHASE

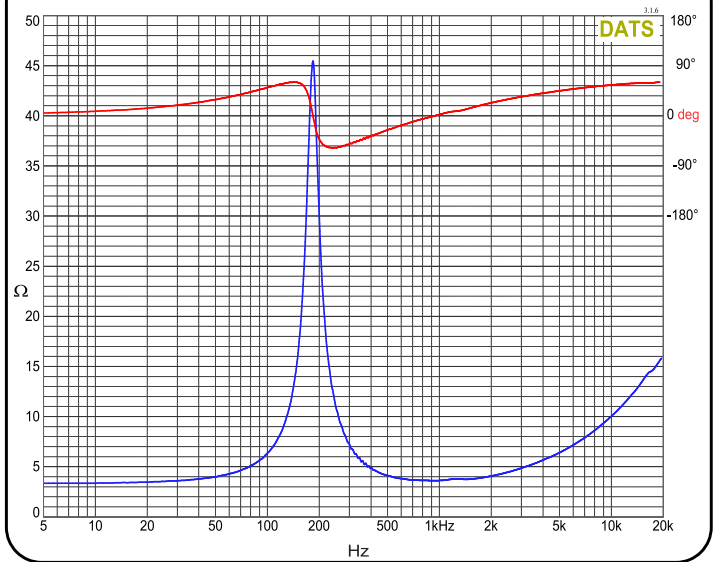

FEATURES

- Dual Neodymium motor structure for increased output
- Delivers crisp, clear audio, ensuring an immersive listening experience
- High-quality audio solutions without breaking the bank, ideal for budget-conscious projects
- Suitable for commercial installations, DIY projects, art exhibits, and more

FREQUENCY RESPONSE

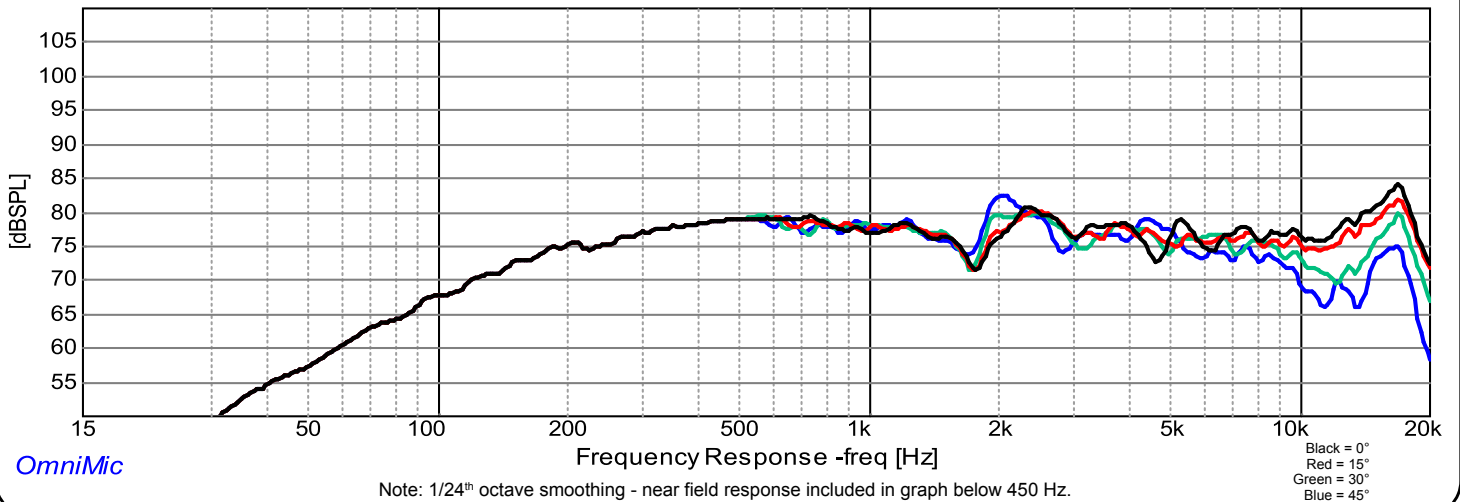

Note: 1/24th octave smoothing - near field response included in graph below 450 Hz.