



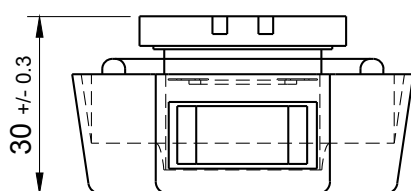

# IMS™ Plastic Cover Dual Suspension 25mm Interchangeable Hardware Mount Exciter 20W 4 Ohm EX25PCDS-4

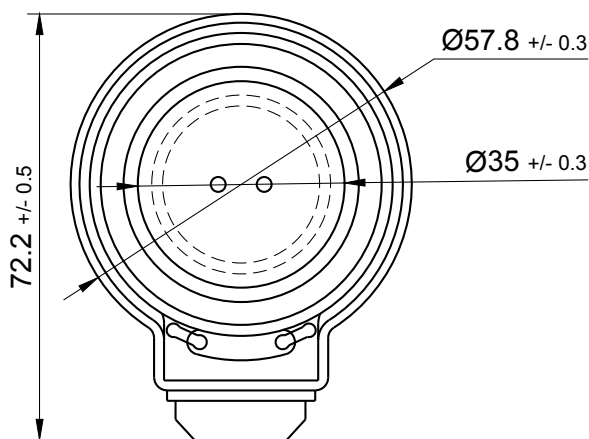

Note: All dimensions in mm.

## FEATURES

- Exclusive IMS Interchangeable mount allows you to A/B test different exciters
- Rare-earth neodymium motor and a proprietary two-layer voice coil
- 20 watt RMS power handling


## APPLICATIONS

- Electronic gaming machines
- Advertising signage
- Point-of-purchase displays
- Multimedia exhibits
- Commercial distributed audio
- Kiosks
- Automotive audio

## PARAMETERS


|                       |              |
|-----------------------|--------------|
| Impedance             | 4 ohms       |
| Re                    | 4.2 ohms     |
| Le                    | 0.09 @ 10kHz |
| Fs                    | 99.7 Hz      |
| Qms                   | N/A          |
| Qes                   | N/A          |
| Qts                   | 1.122        |
| Mms                   | N/A          |
| Cms                   | N/A          |
| Sd                    | N/A          |
| Vd                    | N/A          |
| Bl                    | N/A          |
| Vas                   | N/A          |
| Xmax                  | N/A          |
| VC Diameter           | 25 mm        |
| SPL                   | N/A          |
| RMS Power Handling    | 20 watts     |
| Useable Freq Response | N/A          |

## IMPEDANCE/PHASE

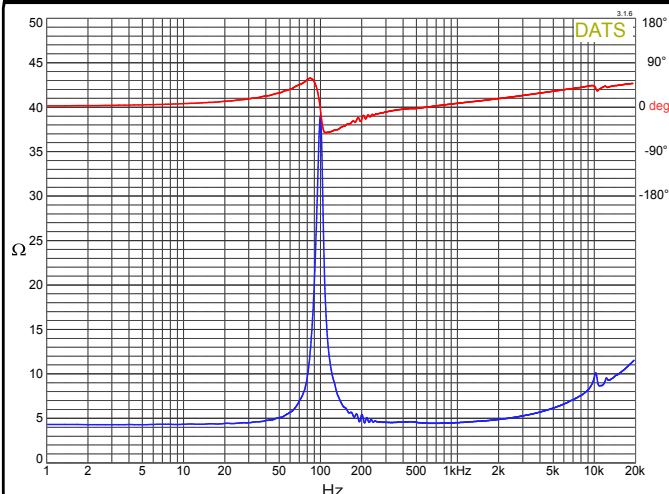

Measurement taken with transducer uncoupled facing upward.

## FREQUENCY RESPONSE

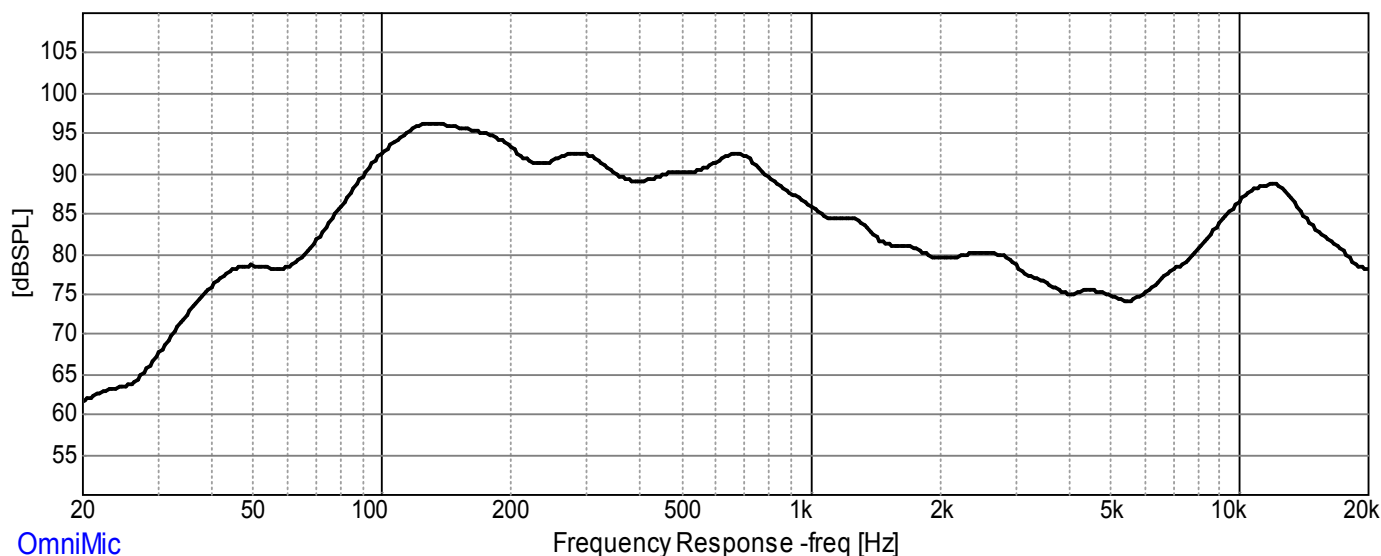

1/3rd octave smoothing - measurement taken with transducer adhered off-center  
on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.