




IMS™ Vented Conex Suspension 25mm Interchangeable Hardware Mount Exciter 20W 4 Ohm EX25VCS-4

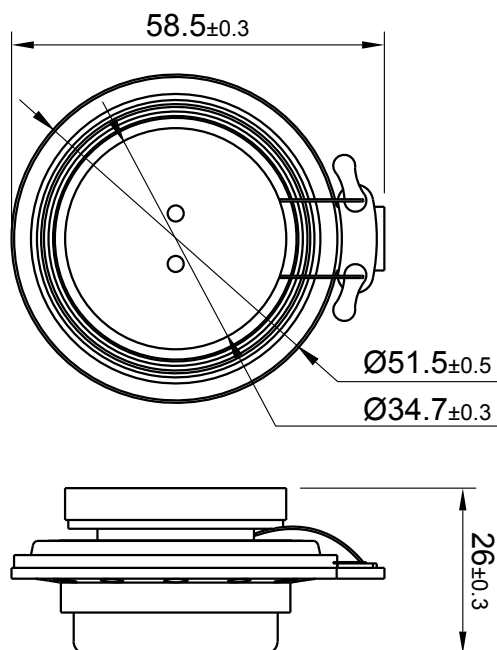

Note: All dimensions in mm.

FEATURES

- Exclusive IMS Interchangeable mount allows you to A/B test different exciters
- Rare-earth neodymium motor and a proprietary two-layer voice coil
- 20 watt RMS power handling


APPLICATIONS

- Electronic gaming machines
- Advertising signage
- Point-of-purchase displays
- Multimedia exhibits
- Commercial distributed audio
- Kiosks
- Automotive audio

PARAMETERS


Impedance	4 ohms
Re	4.4 ohms
Le	0.07 @ 10kHz
Fs	104.1 Hz
Qms	N/A
Qes	N/A
Qts	1.238
Mms	N/A
Cms	N/A
Sd	N/A
Vd	N/A
Bl	N/A
Vas	N/A
Xmax	N/A
VC Diameter	25 mm
SPL	N/A
RMS Power Handling	20 watts
Useable Freq Response	N/A

IMPEDANCE/PHASE

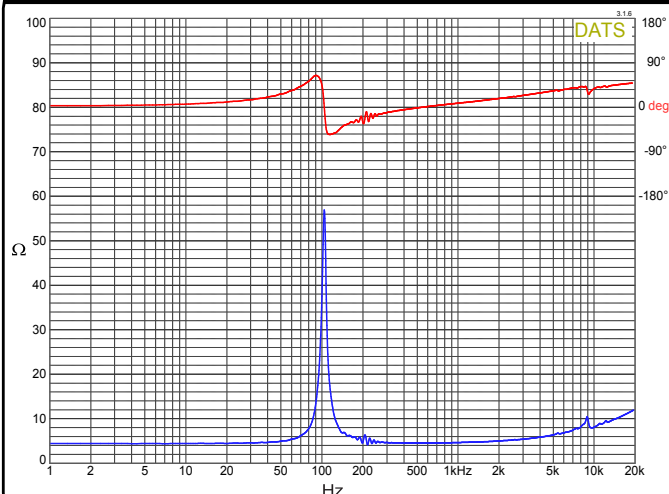

Measurement taken with transducer uncoupled facing upward.

FREQUENCY RESPONSE

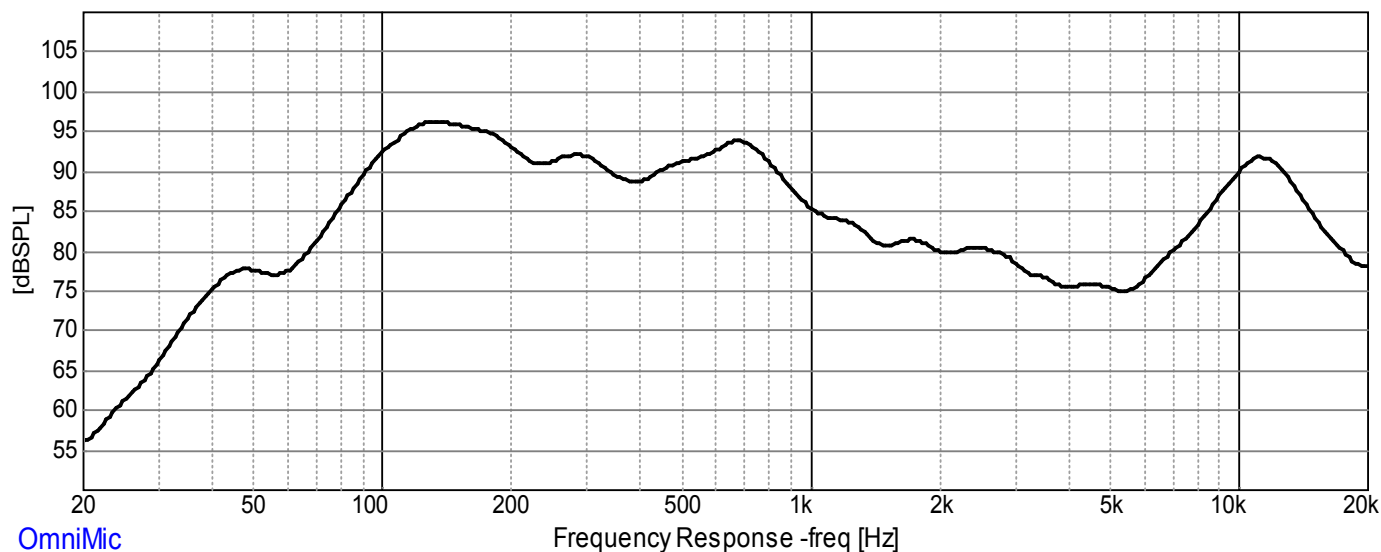

1/3rd octave smoothing - measurement taken with transducer adhered off-center
on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.