


FEATURES

- Same performance specs as the popular DC28F "Silkies"
- Truncated faceplates permit close driver spacing
- Damped rear chamber makes low crossover points possible
- Treated silk dome offers smooth response with airy highs
- Matches or exceeds the performance of many high-dollar tweeters


PARAMETERS

Impedance	8 ohms
Re	5.4 ohms
Le	0.09 mH @ 10 kHz
Fs	834 Hz
Qms	0.81
Qes	1.33
Qts	0.50
Mms	N/A
Cms	N/A
Sd	6.6 cm ²
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	29 mm
SPL	89 dB @ 1W/1m
RMS Power Handling	50 watts
Usable Frequency Range (Hz)	1,300 - 20,000 Hz

IMPEDANCE/PHASE

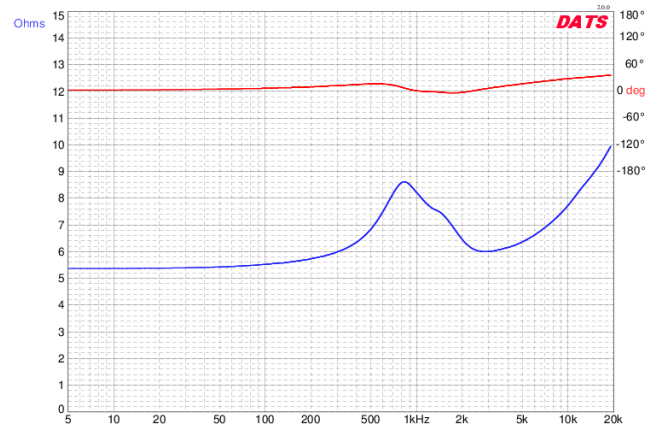

FREQUENCY RESPONSE

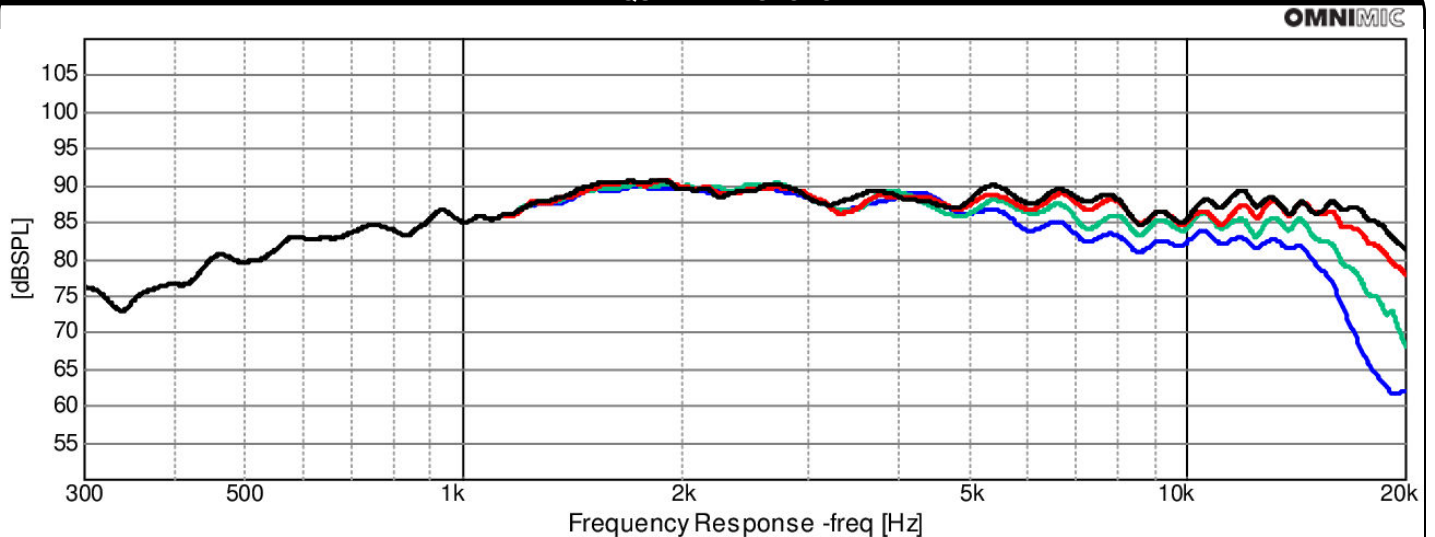

OmniMic

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°