





# ND16FA-4 5/8" Soft Dome Neodymium Tweeter 4 Ohm

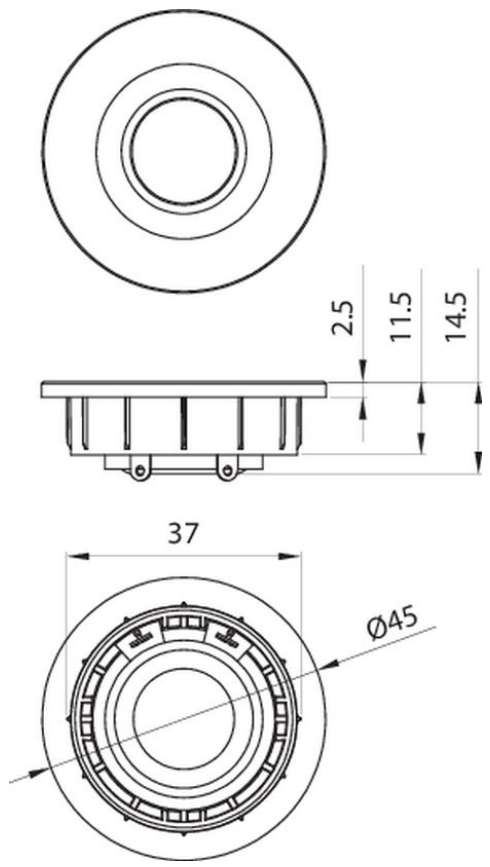

PARAMETERS	
Impedance	4 ohms
Re	3.17 ohms
Le	0.03 mH
Fs	2246 Hz
Qms	3.71
Qes	3.46
Qts	1.79
Mms	N/A
Cms	N/A
Sd	N/A
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	0.625 mm
SPL	93 dB 2.83V/1m
RMS Power Handling	30 watts
Usable Frequency Range (Hz)	4,000 - 20,000 Hz

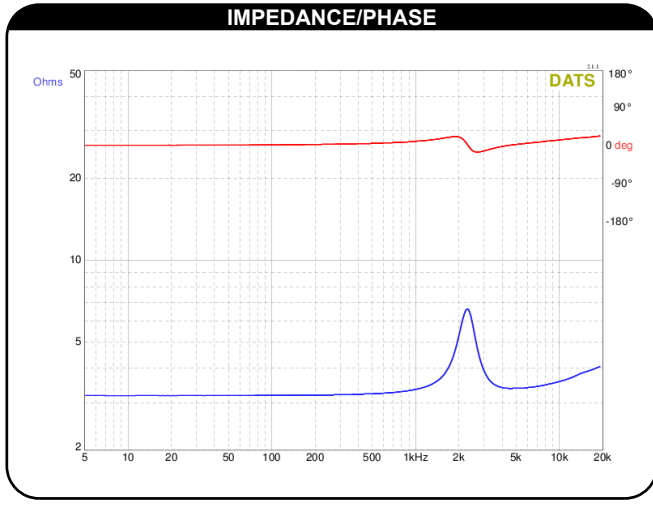

- ### FEATURES
- Ferrofluid enhances power handling and helps damp resonance
  - Powerful neodymium motor keeps tweeter small with impressive efficiency
  - Compact faceplate is perfect for minimal center-to-center distances
  - Easy installation, front mount pressfit design

