


**FEATURES**

- 3/4" Silk dome provides articulate yet non-fatiguing high frequency reproduction
- Exceptionally flat and smooth frequency response
- Ferrofluid for improved power handling and damping
- Neodymium magnet low-distortion motor system


**PARAMETERS**

Impedance	4 ohms
Re	3.4 ohms
Le	0.03 mH @ 10kHz
Fs	1696 Hz
Qms	1.90
Qes	4.99
Qts	1.38
Mms	N/A
Cms	N/A
Sd	31.4 cm <sup>2</sup>
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	.75"
SPL	90.0 dB @ 2.83V/1m
RMS Power Handling	20 watts
Usable Frequency Range (Hz)	3,000 - 20,000 Hz

**IMPEDANCE/PHASE**

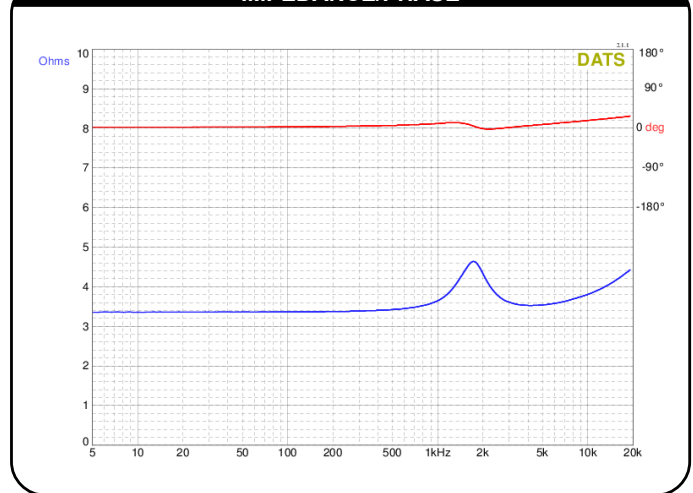

**FREQUENCY RESPONSE**

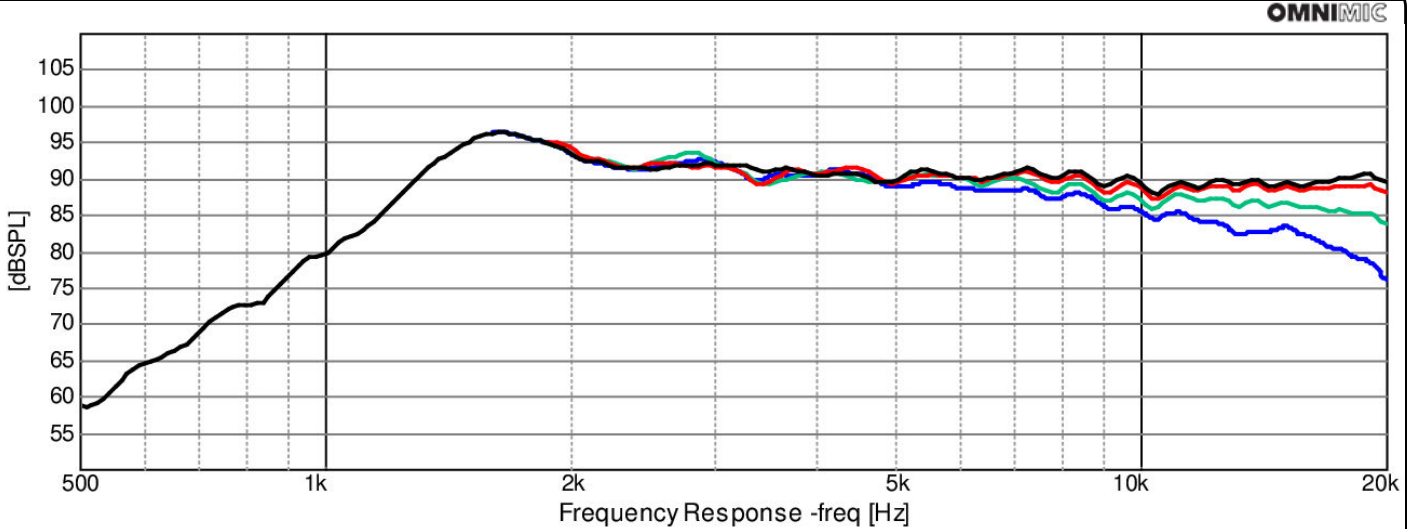

OmniMic

Note: 1/24<sup>th</sup> octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°  
Red = 15°  
Green = 30°  
Blue = 45°