

Note: All dimensions in mm.


Parameters

Impedance (Ω)	8
Re (Ω)	7.03
Le (mH) @ 1 kHz	0.36
Fs (Hz)	1297
Qms	2.21
Qes	19.9
Qts	1.46
Mms (g)	—
Cms (mm/N)	—
Sd (cm ²)	1.77
Vd (cm ³)	0.02
BL (Tm)	—
VAs (liters)	—
X _{MAX} (mm)	0.1
VC Diameter (mm)	10
SPL (dB 1W/1m)	77
RMS Power Handling (w)	0.25
Usable Frequency Range (Hz)	1,200-20,000

Features

- Lightweight Mylar diaphragm
- Extended frequency range
- Neodymium magnet structure
- Injection-molded nonmetallic frame
- Ultra-miniature size installs anywhere
- 8 ohm impedance compatible with most amplifiers

Frequency Response

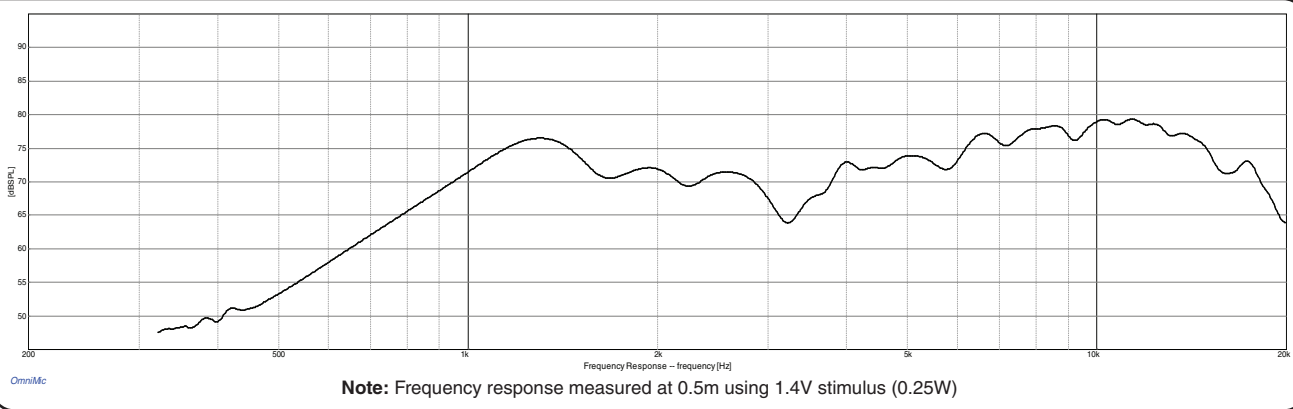

Impedance/Phase

