

Note: All dimensions in mm.


Features

- Lightweight Mylar diaphragm
- Extended frequency range
- Neodymium magnet structure
- Stamped steel frame
- Suitable for headphones
- 32 Ohm impedance

Parameters

Impedance (Ω)	32
Re (Ω)	31.98
Le (mH) @ 1 kHz	1.31
Fs (Hz)	137.9
Qms	0.66
Qes	1.15
Qts	0.42
Mms (g)	0.06
Cms (mm/N)	21.3
Sd (cm ²)	4.91
Vd (cm ³)	0.05
BL (Tm)	1.23
VAs (liters)	0.72
XMAX (mm)	0.1
VC Diameter (mm)	12.5
SPL (dB 1W/1m)	78
RMS Power Handling (w)	0.25
Usable Frequency Range (Hz)	137-20,000

Frequency Response

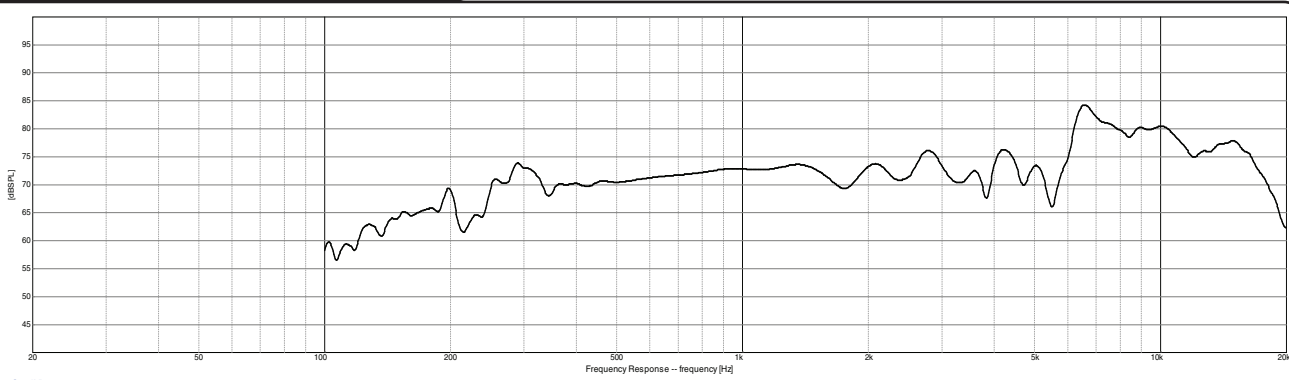

Note: Frequency response measured at 1.0m using 2.83V stimulus (0.25W)

Impedance/Phase

