


PARAMETERS

Impedance	4 ohms
Re	3.45 ohms
Le	1.8 mH @ 1 kHz
Fs	37.7 Hz
Qms	7.42
Qes	0.50
Qts	0.46
Mms	95.5g
Cms	0.19 mm/N
Sd	346.4 cm ²
Vd	287.5 cm ³
BL	12.6 Tm
Vas	32.1 liters
Xmax	8.3 mm
VC Diameter	49.5 mm
SPL	91 dB @ 2.83V/1m
RMS Power Handling	200 watts
Usable Frequency Range (Hz)	31 - 200 Hz


FEATURES

- Sturdy stamped steel frame
- Vented pole piece and bumped back plate
- Inductance-reducing copper pole piece cap
- Treated non-pressed paper/Kevlar cone with rubber surround
- 4-layer VC with polyimide former

IMPEDANCE/PHASE

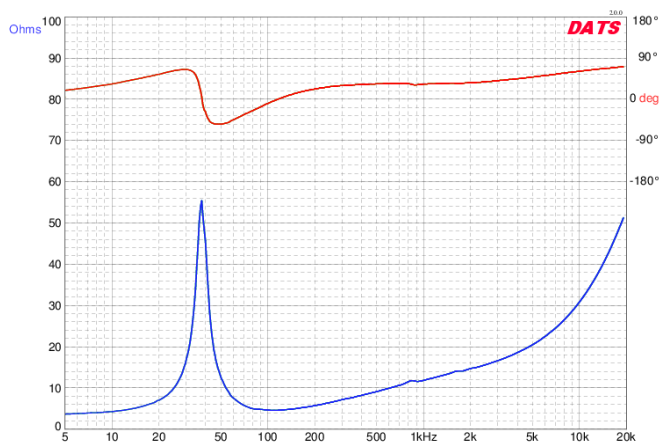

FREQUENCY RESPONSE

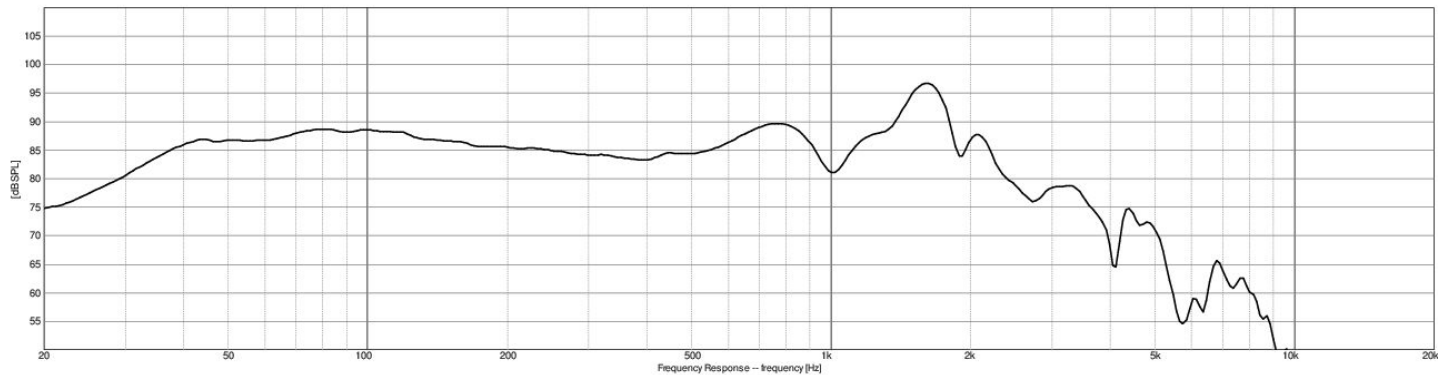

Note: 1/12th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°