


PARAMETERS

Impedance	4+4 ohms
Re	7.5 ohms
Le	5.34 mH @ 1 kHz
Fs	33.7 Hz
Qms	4.95
Qes	0.56
Qts	0.51
Mms	166g
Cms	0.13 mm/N
Sd	547.3 cm ²
Vd	54.7 cm ³
BL	21.7 Tm
Vas	56.6 liters
Xmax	10 mm
VC Diameter	50 mm
SPL	88 dB @ 2.83V/1m
RMS Power Handling	250 watts
Usable Frequency Range (Hz)	28 - 300 Hz


FEATURES

- Innovative low-profile subwoofer – only 4" thick!
- 10mm Xmax for uncompromised bass performance
- Dual 4 ohm voice coils, 6 layers total
- Rigid flat honeycomb fiberglass cone
- Low distortion ferrite motor with dual aluminum shorting rings

IMPEDANCE/PHASE

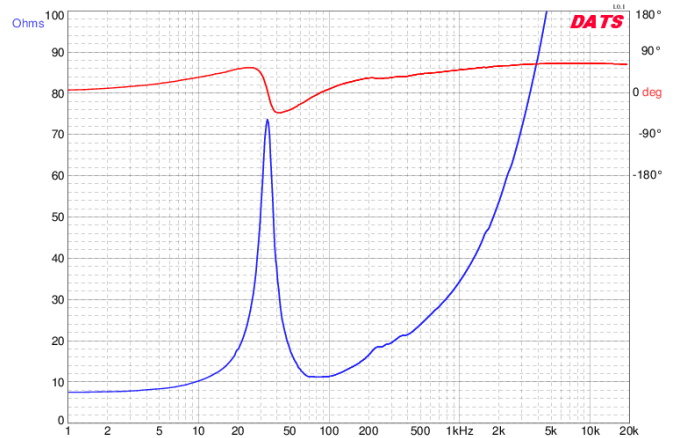

FREQUENCY RESPONSE

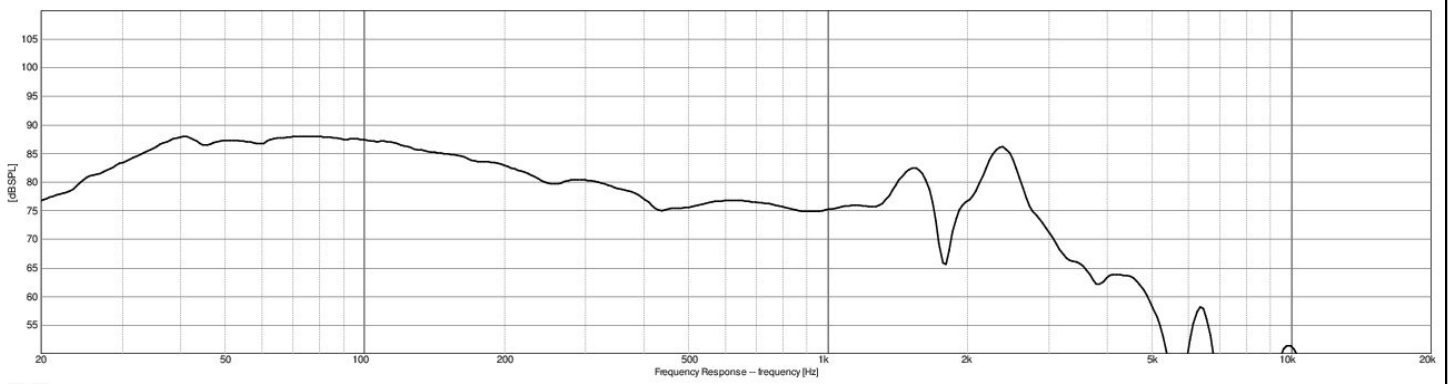

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°