


PARAMETERS

Impedance	8 ohms
Re	5.6 ohms
Le	3.9 mH
Fs	28.3 Hz
Qms	11.2
Qes	0.34
Qts	0.33
Mms	171g
Cms	0.19 mm/N
Sd	1,241.1 cm ²
Vd	746.5 cm ³
BL	22.3 Tm
Vas	402 liters
Xmax	6.0 mm
VC Diameter	76 mm
SPL	97.8 dB @ 2.83V/1m
RMS Power Handling	500 watts
Usable Frequency Range (Hz)	26 - 2,000 Hz


FEATURES

- Strong, low-mass carbon fiber impregnated paper cone
- I-beam rolled edge 1.5 mm steel frame
- Low distortion motor system w/copper cap
- Powerful 80 oz. ceramic ferrite magnet
- Vented pole piece/vented voice coil gap improve thermal management

IMPEDANCE/PHASE

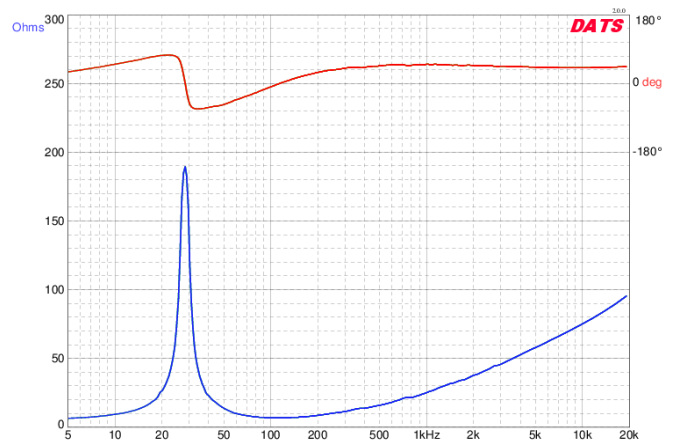

FREQUENCY RESPONSE

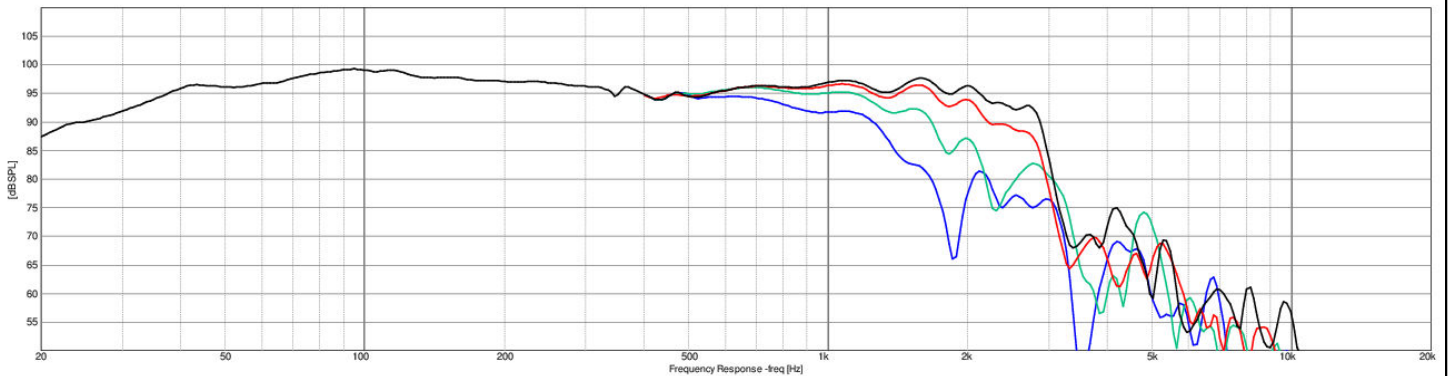

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°